




SAE S.r.l.
 Corso Kennedy, 30
 10070 Robassomero (TO) (Italy)
 Tel: +39 011 924.19.91
 Fax: +39 011 924.17.69
 www.sae-srl.com

Datasheet				
Mod.	Dwg n.	Date	Check	Rev.
6GIK-S-58-A	941178	19/10/2016	AC	0

SAE-Aplus® FIRE EXTINGUISHER 6L with internal CO₂ cartridge Certified PED 2014/68/EU and EN 3.7 Fire rating 43A



Organic solid materials
 wood, rubber, textiles, etc.

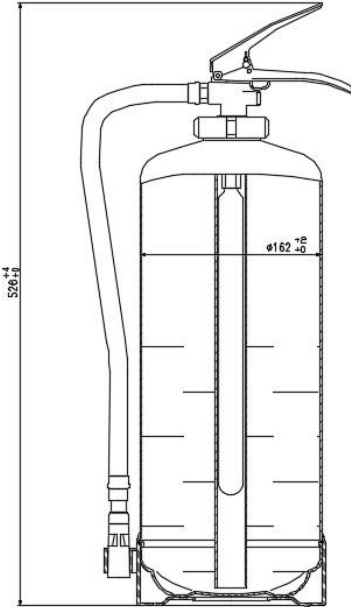

Technical specification

Cylinder diameter _____ : 162 mm
 Material _____ : Steel cylinder internal coated, aluminium valve
 Operating pressure _____ : 15 bar at 20°C
 Test pressure _____ : 30 bar
 Burst pressure _____ : > 55 bar
 Temperature range _____ : 0°C + 60°C
 Extinguishing agent _____ : SAE-Aplus®
 Propellant _____ : 50 gr CO₂ cartridge
 Nominal charge _____ : 6 l
 Jet length _____ : ~ 6 m


Dimensions

Height: 526 mm
 Diameter: 162 mm
 Weight: 11kg

SPARE PARTS LIST

Pos.	Description	Code
1	Complete valve	7204031
1A	Seal	2250008
1B	Safety pin	2100015
1C	O-Ring Ø25,12x1,78	2090040
1D	Safety valve	2030015
1E	O-Ring Ø52x4	2090034
2	Piston group	2380015
3	Spring	2151200
4	Tube holder	2160014
5	Dip tube	2230180
6	Cylinder	0010551
7	50gr CO ₂ cartridge	2450025
8	SAE-Aplus®	2020055
9	Label	-
10	Hose	2330126
11	Filter	2410006

Pos.	Description	Code
12	Nozzle	2290016
13	Base (black)	2017450
14	Wall bracket	2200064

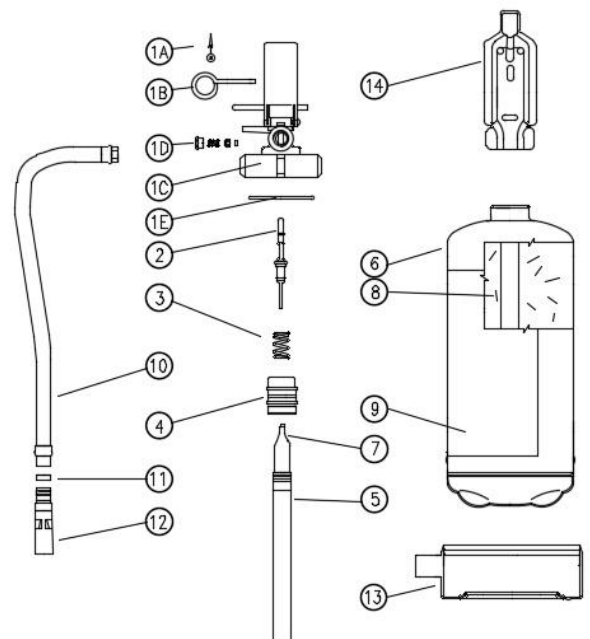

The use of non original spare parts may cause malfunctions loss

Maintenance and Guarantee

Maintenance must be made periodically by, trained and certified staff, according to the local regulations of the country where it is located. The extinguisher is guaranteed for 24 months from the date of the supply. The guarantee includes, repairing or replacement for production defects, unit must be sent back to the factory free of charge, only when authorized written agreement with our sales office has been reached. The guarantee expires in case of tampering and bad maintenance made by not-authorized staff. It must be recharged only by staff authorized and certified by SAE S.r.l. use only original extinguisher agent and spare parts.

Technical data are subject to modification for improvements without prior notice